


DURA•SKRIM® 2FR & 10FR

Fire Retardant Four-Layer Reinforced Laminate

RAVEN
INDUSTRIES

Product Description

DURA•SKRIM® 2FR and 10FR consist of two sheets of high-strength fire-retardant virgin film laminated together with a third layer of molten polyethylene. A heavy-duty scrim reinforcement placed between these plies greatly enhances tear resistance and increases service life. DURA•SKRIM's fire-retardant films meet or exceed NFPA's 701 test, method 2 (Large Scale Requirements).

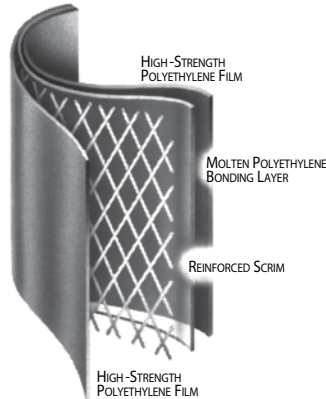

Product Use

DURA•SKRIM® 2FR and 10FR are used in applications that require a fire-retardant material, and demand high puncture and tear strengths.

Size & Packaging

DURA•SKRIM® 2FR and 10FR are available in a variety of widths and lengths. Panel sizes up to 40,000 square feet are available. All panels are accordion folded and tightly rolled on a heavy-duty core for ease of handling and time saving installation.



Building Abatement Enclosure

Product	Part #
DURA•SKRIM 2FR	R5CCF
DURA•SKRIM 10FR	R10CCF

APPLICATIONS

Construction Enclosures	Temporary Walls
Asbestos Abatements	Curtains
Fumigation Covers	Job Site Coverings

DURA•SKRIM®

DURA♦SKRIM® 2FR & 10FR

Fire Retardant Four-Layer Reinforced Laminate

PROPERTIES	TEST METHOD	DURA♦SKRIM 2FR		DURA♦SKRIM 10FR	
		Imperial	Metric	Imperial	Metric
APPEARANCE		Translucent, White Color		Translucent, White Color	
THICKNESS, NOMINAL		6 mil	0.15 mm	10 mil	0.25 mm
WEIGHT		20 lbs/MSF 2.8 oz./yd ²	98 g/m ²	43 lbs/MSF 6.2 oz./yd ²	210 g/m ²
CONSTRUCTION		Extrusion laminated with scrim reinforcement			
1" TENSILE STRENGTH	ASTM D7003	45 lbf/in	79 N/cm	60 lbf/in	105 N/cm
ELONGATION AT FILM BREAK	ASTM D7003	400 %	400 %	500 %	500 %
GRAB TENSILE	ASTM D7004	60 lbf	267 N	80 lbf	356 N
*TRAPEZOID TEAR	ASTM D4533	35 lbf	156 N	52 lbf	231 N
HYDROSTATIC RESISTANCE	ASTM D751	32 psi	220 kPa	74 psi	510 kPa
MULLEN BURST	ASTM D751	50 psi	345 kPa	90 psi	621 kPa
MAXIMUM USE TEMPERATURE		180°F	82°C	180°F	82°C
MINIMUM USE TEMPERATURE		-70°F	-57°C	-70°F	-57°C
WVTR	ASTM E96 Procedure B	0.587 grains/(100in ² ·day)	0.590 g/(m ² ·day)	0.214 grains/(100in ² ·day)	0.202 g/(m ² ·day)
PERM RATING	ASTM E96 Procedure B	0.086 Perms grains/(ft ² ·hr·in Hg)	0.057 Perms g/(24hr·m ² ·mm Hg)	0.031 Perms grains/(ft ² ·hr·in Hg)	0.021 Perms g/(24hr·m ² ·mm Hg)
BURNING CHARACTERISTICS FLAME SPREAD INDEX SMOKED DEVELOPED VALUE	ASTM E84 Procedure A	5 20		5 55	

*Tests are an average of diagonal directions.

MEETS OR EXCEEDS THE FOLLOWING FIRE TESTING:

1. National Fire Protection Association (NFPA) 701, Test Method 2 (Large Scale)
2. Class "A" Wall & Ceiling Finish Category as given in the National Fire Protection Association Life Safety Code 101, "Interior Wall and Ceiling Finish Classification" (ASTM E-84-97a).

DURA♦SKRIM♦

DURA♦SKRIM® 2FR & 10FR are fire-retardant four-layer reinforced extrusion laminates. The outer layers consist of a high quality polyethylene film with a high concentration of fire-retardant additives. DURA♦SKRIM® 2FR & 10FR are reinforced with a heavy duty scrim laid in a diagonal pattern spaced 3/8" apart with an additional machine direction scrim every 9" (R5CCF) and 3" (R10CCF) across the width. The individual plies are laminated together with molten polyethylene. DURA♦SKRIM® 2FR & 10FR are designed to meet the stringent requirements of the Boston Fire Department for Temporary Enclosures.

Note: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage. Limited Warranty available at www.RavenEFD.com



Scan QR Code to download current technical data sheets via the Raven website.

RAVEN
INDUSTRIES

Engineered Films Division
P.O. Box 5107
Sioux Falls, SD 57117-5107
Ph: (605) 335-0174 • Fx: (605) 331-0333

Toll Free: 800-635-3456
Email: efdsales@ravenind.com
www.ravenefd.com
8/14 EFD 1075