

SF 22

DATA SHEET




WEDGE SYSTEM: ACCOMODATES ALL SMALL, MEDIUM AND LARGE CONSTRUCTION TUBES SIZES 8" & 10"

RIBS FOR STRUCTURAL INTEGRITY

AIR VENT HOLES

FLAT AREA INCREASES RESISTANCE TO UPLIFT

REBAR TIE HOLES ON EACH CORNER

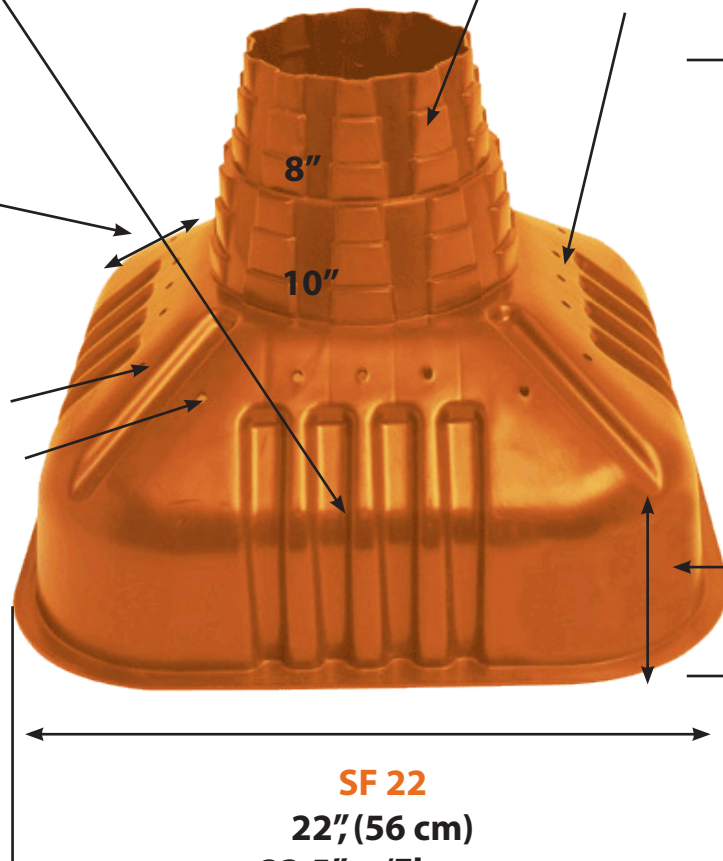

SF 22
16.6"
(42 cm)

MINIMUM EDGE THICKNESS 6" INCREASES BEARING CAPACITY & STRUCTURAL INTEGRITY

SF 22
22", (56 cm)
23.5" w/Flange
(60 cm)

Model#	Concrete Volume
SF 22	2.0 CuFt

QTY (1) Footing	Conversion
4 Bags	60 LB. Bag = 0.50 CuFt
3 Bags	80 LB. Bag = 0.66 CuFt
0.07 Yards	1 Cubic Yard = 27 CuFt

CONCRETE TYPE
MINIMUM 3000 PSI

**If you are placing more than 4 footings, we strongly recommend that you order redi-mix concrete and pour your footings and columns all together.*

** There is a "delivery surcharge" for each time you order concrete - make sure you calculate concrete QTY for your project so you only have to order once!*
DO NOT UNDER ORDER!