



SF 28


DATA SHEET

WEDGE SYSTEM: ACCOMODATES ALL SMALL, MEDIUM AND LARGE CONSTRUCTION TUBES SIZES 8", 10", 12"

FLAT AREA INCREASES RESISTANCE TO UPLIFT

RIBS FOR STRUCTURAL INTEGRITY

REBAR TIE HOLES ON EACH CORNER

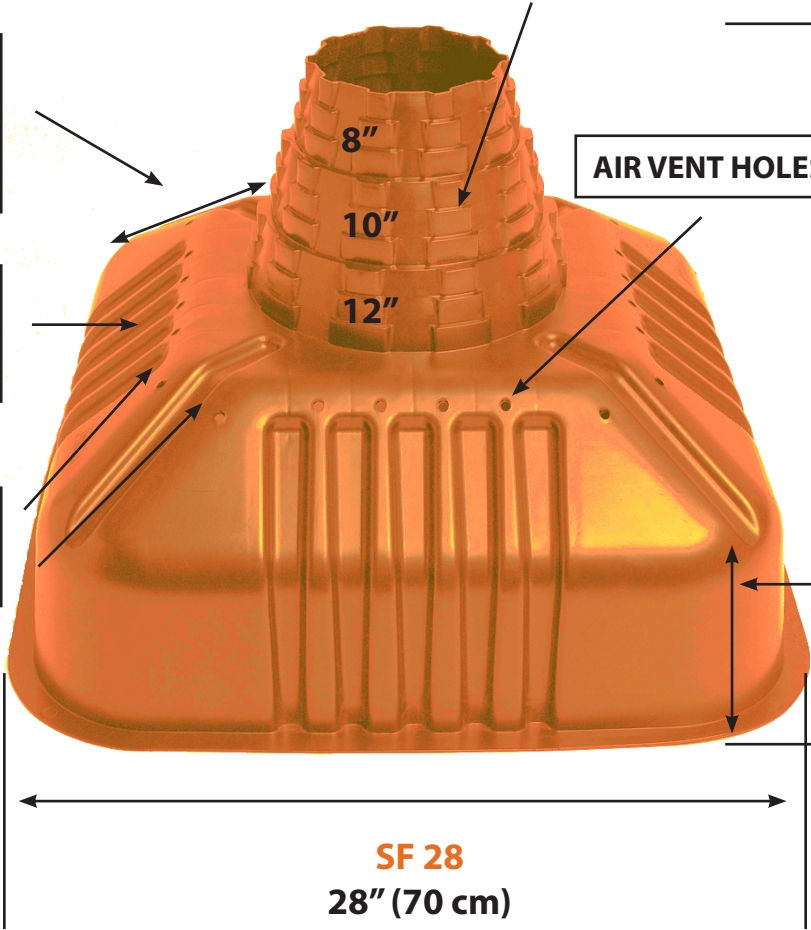

AIR VENT HOLES

SF 28
20"
(51 cm)

MINIMUM EDGE THICKNESS 6" INCREASES BEARING CAPACITY & STRUCTURAL INTEGRITY

SF 28
28" (70 cm)
30" w/Flange
(76 cm)

Model#	Concrete Volume
SF 28	4.5 CuFt

CONCRETE TYPE
MINIMUM 3000 PSI

QTY (1) Footing	Conversion
9 Bags	60 LB. Bag = 0.50 CuFt
7 Bags	80 LB. Bag = 0.66 CuFt
0.16 Yards	1 Cubic Yard = 27 CuFt

** If you are placing more than 1-3 footings, we strongly recommend that you order redi-mix concrete and pour your footings and columns all together.*

** There is a "delivery surcharge" for each time you order concrete - make sure you calculate concrete QTY so you only have to order once! **DO NOT UNDER ORDER!***

** Most redi-mix trucks contain 7-9 Yards of concrete*