



Need to manage your energy costs



## Consider ICP Adhesives & Sealants, Inc. polyurethane foam products

**I Zk1**

**Simple - improve performance.** FOMO Products, Inc. offers a unique "stop air filtration" package of polyurethane foam products that will handle most air sealing requirements, eliminating the need to purchase multiple types of insulation and sealant products. The investment in reducing air filtration is nominal in new construction and remodeling, while the payback in energy savings and comfort is significant.

### Builder's Advantages

- Reduces energy costs and HVAC equipment size
- Assists home in attaining an Energy Star® rating
- Provides potential for Energy Efficient Mortgages


### Insulator's Advantages

- **Do it yourself:** fast application and using your own crew reduces labor costs
- Widest range of applications
- Complete "foam and seal" package

### Home Owner's Advantages

- Effective air barrier prevents condensation, greatly reducing the potential for mold growth
- Improves indoor comfort and air quality
- Significantly lower heating and cooling cost
- Works toward the energy tax credit

Product information and reference charts inside.

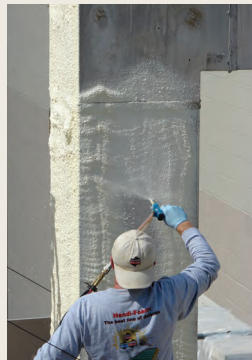

## Two-Component Foam Kits *for large applications*

### HANDI-FOAM® QUICK CURE SPRAY FOAM

*Disposable, multipurpose, two-component, polyurethane froth foam*

Fomo's disposable foam kits are chemically cured, two-component polyurethane foam kits designed to fill large voids and surfaces. Compared to standard insulation products, Fomo's disposable foam kits have higher insulation values, are easy to install, and provide complete air tight coverage. The portability of the foam kits allows for maximum flexibility to fit virtually any application job.

The pre-pressurized, portable two-component froth systems are dispensed through the state-of-the-art Handi-Gun® froth dispensing unit, providing unsurpassed quality and flexibility in end-use performance.



#### SPECIFICATIONS

- expansion is 4-8 times the dispensed volume
- tack-free in 60 seconds; cuttable within 2-5 minutes; fully cured within 1 hour
- R-value of 6-7 per inch; density range of 1.75 lb./ft.<sup>3</sup>
- **E-84 Class 1 spray foam** contains flame retardents in order to meet ASTM E-84 testing (Class 1 is a flame resistance rating; the foam is not fire-proof)

#### TYPICAL APPLICATIONS

- insulate and deaden sound
- insulate and seal rim and bond joists
- insulate and seal wall cavities
- cold storage
- insulate spas, hot tubs, showers and plumbing fixtures
- insulate and seal attic floor
- fill molds and large voids
- sealing around pipes and duct work

|  | Item # / Description  | Coverage                                       | Price  |
|--|---|--|--|
|  | #P10600 /<br>II-12 Handi-Foam   | 12 bd. ft.<br>(12 sq. ft. at 1" thickness)     | Special Order Only   |
|  | #P10705 /<br>II-105 Handi-Foam E-84 Class 1   | 105 bd. ft.<br>(105 sq. ft. at 1" thickness)   | Includes 8 nozzles <b>\$249<sup>52</sup></b>                             |
|  | #P10726 /<br>II-205 Handi-Foam E-84 Class 1   | 205 bd. ft.<br>(205 sq. ft. at 1" thickness)   | Includes 8 nozzles <b>\$361<sup>85</sup></b>                             |
|  | #P10762 /<br>II-605 Handi-Foam E-84 Class 1   | 605 bd. ft.<br>(605 sq. ft. at 1" thickness)   | Includes 8 nozzles <b>\$699<sup>95</sup></b>                             |
|  | #P22070 /<br>System 17 Handi-Foam<br>E-84 Class 1 Refill<br><br>• Heated hose required<br>• Additional large refill systems available | 1980 bd. ft.<br>(1980 sq. ft. at 1" thickness) | Call for<br>Information & Pricing<br><br>Quantity Discounts<br>Available |

### HANDI-FLOW® POUR-IN-PLACE SLOW RISE FOAM

*Disposable, multipurpose, two-component, polyurethane froth foam*

HANDI-FLOW foams are chemically cured systems engineered with a slower cure time than HANDI-FOAM spray foams, allowing the foam to flow throughout the cavity to fill the entire void.



#### SPECIFICATIONS

- expansion is 3-5 times the dispensed volume
- tack-free in 60-90 seconds; cuttable within 5-10 minutes; fully cured within 1 hour
- R-value of 5.9 per inch; density of 2.0 lb./ft.<sup>3</sup>

#### TYPICAL APPLICATIONS

- fill and insulate large voids and bind cavities
- add structural support, prevent vibrations and deaden sound
- provide buoyancy (meets the Coast Guard requirements for floatation)

|  | Item # / Description                                    | Coverage              | Price              |
|--|---|-----------------------|--------------------|
|  | #P10760 /<br>2-43 Handi-Flow Slow Rise<br>Pour-in-Place | 43.7 ft. <sup>3</sup> | Special Order Only |

## Two-Component Products *for large applications*

### HANDI-FOAM® SOUND BARRIER POLYURETHANE FOAM



*Multipurpose, open cell, low density polyurethane froth foam*


HANDI-FOAM Sound Barrier is designed for sound deadening and filling and insulating large surfaces. Sound Barrier achieves a Sound Transmission Coefficient (STC) of 35 at three inches thick. Its high expansion properties easily fills voids, and its quick cure time reduces labor time and costs.

#### SPECIFICATIONS

- optimum application temperature is 80°F
- tack-free in 30-45 seconds; cuttable in 3-5 minutes; cures within 1 hour
- R-value of 3.7 ±0.2"; density range of 0.75±0.25 lb./ft.<sup>3</sup>
- Noise Reduction Coefficient (NRC) of 70

#### TYPICAL APPLICATIONS

- sound deadening in interior walls, office walls, media rooms, play rooms and server rooms

|  | Item # / Description              | Coverage                                     | Price                     |
|--|-----------------------------------|--|---------------------------|
|  | #P10697 /<br>II-250 Sound Barrier | 250 bd. ft.<br>(250 sq. ft. at 1" thickness) | <b>\$249<sup>40</sup></b> |

## One-Component Products *for small applications*

### HANDI-FOAM® FIREBLOCK FOAM SEALANT



*Multipurpose, UL classified, one-component, polyurethane foam*


Fireblock is used to block the passage of flame and smoke in concealed penetrations from room to room and from floor to floor in Type V residential construction (International Residential Code, Section R602.8). It is not to be used as a fireblock in commercial construction.

#### SPECIFICATIONS

- expansion is up to 3 times the dispensed volume
- tack-free in ≈5 minutes; cuttable within 1 hour; cures within 12-24 hours
- R-value of 4-5 per inch; density range of 1.1 lb./ft.<sup>3</sup>
- orange colored foam for easy identification
- meets ASTM E-84 Class 1 specifications for caulks and sealants

#### TYPICAL APPLICATIONS

- bead application for filling small holes, gaps and cracks
- fill gaps and around pipes and behind electrical outlets
- seal cracks at wall and floor joints
- seal around HVAC units and duct work
- fix small holes and other damage
- block insect and rodent pathways
- seal wire and plumbing penetrations

|   | Item # / Description                     | Theoretical Yield              | Price                    |
|---|--|--------------------------------|--------------------------|
|  | #P30181 /<br>24 oz. Fireblock Gun Foam   | BEAD SIZE YIELD VOLUME         | <b>\$14<sup>04</sup></b> |
|   |  | ¼" 4403' 1.50 ft. <sup>3</sup> |                          |
|   |  | ⅜" 1957' 1.50 ft. <sup>3</sup> |                          |
|   | #P30192 /<br>24 oz. Fireblock Straw Foam | BEAD SIZE YIELD VOLUME         | <b>\$15<sup>07</sup></b> |
|   |  | ¼" 3992' 1.36 ft. <sup>3</sup> |                          |
|   |  | ⅜" 1774' 1.36 ft. <sup>3</sup> |                          |

### HANDI-SEAL® WINDOW & DOOR FOAM SEALANT



*Multipurpose, UL classified, one-component, polyurethane foam*


HANDI-SEAL is a patented closed cell, low pressure window and door foam. It has an extremely low pressure build while curing, which greatly reduces the chance of bowing or distorting windows or doors. HANDI-SEAL's Dry Seal Technology™ prevents moisture and mold problems by repelling water.

#### SPECIFICATIONS

- expands at ½ the pressure to eliminate bowing of window and door frame
- bead growth of 200-300% during first hour of cure
- tack-free in ≈5 minutes; cuttable within 1 hour; cures within 12-24 hours
- R-value of 4-5 per inch; density range of 1.44 lb./ft.<sup>3</sup>
- gray colored foam for easy identification; complies w/AAMA document 812-04

#### TYPICAL APPLICATIONS

- bead application for filling small holes, gaps and cracks
- fill gaps and around utility panels, pipes and duct penetrations
- seal around window and door frame joints, beneath base plates, mud sills, top plate penetrations, corner joints, and T-joints

|   | Item # / Description                         | Theoretical Yield              | Price                    |
|---|--|--------------------------------|--------------------------|
|  | #P30272 /<br>24 oz. Window & Door Gun Foam   | BEAD SIZE YIELD VOLUME         | <b>\$12<sup>14</sup></b> |
|   |  | ¼" 2900' 1.04 ft. <sup>3</sup> |                          |
|   |  | ⅜" 1290' 1.04 ft. <sup>3</sup> |                          |
|   | #P30271 /<br>24 oz. Window & Door Straw Foam | BEAD SIZE YIELD VOLUME         | <b>\$11<sup>99</sup></b> |
|   |  | ¼" 2140' .79 ft. <sup>3</sup>  |                          |
|   |  | ⅜" 950' .79 ft. <sup>3</sup>   |                          |



## One-Component Products *for small applications*


### HANDI-FOAM® EXTREME POLYURETHANE FOAM

Multipurpose, UL classified, one-component, polyurethane foam adhesive

HANDI-FOAM Extreme is formulated specifically for use in extreme temperatures and low humidity conditions. It is ideal for the contractor working in cold winter climates or dry desert heat.



| SPECIFICATIONS   | TYPICAL APPLICATIONS  |
|--|---|
| <ul style="list-style-type: none"> <li>optimum application temperature is between 65-80°F, but foam will cure in temperatures below 0°F</li> <li>tack-free in 5-10 minutes; cuttable within 1 hour; cures within 12-24 hours</li> <li>R-value of 4-5 per inch; density range of 1.2 lb./ft.<sup>3</sup></li> </ul> | <ul style="list-style-type: none"> <li>fill and seal joints and fill in wall gaps and cavities</li> </ul> |

| Item # / Description  | Theoretical Yield                      | Price                    |
|---|--|--------------------------|
|  <p><b>#P30295 /<br/>29 oz. Handi-Foam<br/>Polyurethane Foam Sealant</b></p> | BEAD SIZE    YIELD    VOLUME           | <b>\$18<sup>99</sup></b> |
|   | 1/4"    5313'    1.81 ft. <sup>3</sup> |                          |
|   | 3/8"    2361'    1.81 ft. <sup>3</sup> |                          |
| <p><b>#P30002 /<br/>12 oz. Handi-Foam<br/>Polyurethane Foam Sealant<br/>with Straw</b></p>  | 1/4"    1996'    0.68 ft. <sup>3</sup> | <b>\$7<sup>04</sup></b>  |
|   | 3/8"    887'    0.68 ft. <sup>3</sup>  |                          |
|   | 1/2"    499'    0.68 ft. <sup>3</sup>  |                          |

| One-Component vs. Two-Component  |  |
|--|--|
| One-Component Foam   | Two-Component Foam   |
| <ul style="list-style-type: none"> <li>expansion is up to 3x the dispense value</li> <li>cured with atmospheric moisture</li> <li>more efficient than standard caulks</li> <li>ideal for bead applications to seal small gaps, cracks and voids, outlets and plumbing penetrations</li> <li>thickness of more than two inches is not recommended without allowing foam to cure between layers</li> <li>can be applied with straw, gun or cylinder foam dispensing units</li> </ul> | <ul style="list-style-type: none"> <li>cured with a chemical reaction of iso-cyanate and polyol; no reliance on moisture</li> <li>able to bear significant loads immediately after cure</li> <li>designed to cure in various environments surface coverage for varying/irregular thicknesses</li> <li>high densities and compressive strengths</li> <li>greater flexibility of use, including large molds and voids</li> <li>offer a more uniform cell structure, giving it a more consistent density and R-value</li> </ul> |

| Accessories & Parts |  |                          |
|---------------------|--|--------------------------|
| Item #              | Description                            | Price                    |
| F61050              | 7" Steel HT300 Handi-Tool              | <b>\$29<sup>06</sup></b> |
| F65256              | 50' Magnum Starter Kit w/ Cone Nozzles | <b>Call</b>              |
| F66170              | Cone Nozzle                            | <b>\$2<sup>16</sup></b>  |
| F66121              | Fan Nozzle                             | <b>\$1<sup>62</sup></b>  |
| F66220              | 10" Handi-Gun Hose Assembly            | <b>\$74<sup>66</sup></b> |



Prices and product availability are subject to change without notice. All specials and promotions limited to stock on hand. Call for current prices. McQuade & Bannigan Inc. is not responsible for typographical errors and we make every effort to ensure the accuracy of the information published in our catalogs, flyers, and website. The documents and graphics published may contain technical inaccuracies or typographical errors. McQuade & Bannigan Inc. reserves the right to revoke any stated offer and to correct any errors, inaccuracies or omissions. 02/21/18



www.MQB.com

sales@MQB.com

#### Utica

1300 Stark St. • Utica, NY 13502  
Ph: (315) 724-7119 • Fax: (315) 724-0171

#### Watertown

22696 Murrock Circle • Watertown, NY 13601  
Ph: (315) 788-2612 • Fax: (315) 785-0361

#### Syracuse

6300 E. Molloy Rd. • E. Syracuse, NY 13057  
Ph: (315) 671-4400 • Fax: (315) 671-4404